

Technical Data Sheet

Fusionbond[®] 375

June 2015

Page 1 of 2

Product Description

Hernon[®] Fusionbond[®] 375 is a highly thixotropic, two component, room temperature curing, 1:1 ratio, methacrylate adhesive system. Fusionbond[®] 375 is formulated to provide fixturing strength within 7 to 10 minutes. This adhesive forms resilient bonds and maintains its strength over a wide range of temperatures. Fusionbond[®] 375 is suitable for bonding a variety of substrates with a minimum of surface preparation. Fusionbond[®] 375 provides superior toughness at temperatures from -67 to 250 F. Recommended substrates: PVC, acrylic, ABS, stainless steel and some types of fiberglass.

Product Features

- Non-sagging gaps filled to 0.375 inch
- Superior impact and peel strength
- Little or no surface preparation
- Rapid room temperature cure
- 100% reactive
- Excellent environmental and chemical resistance
- Gasoline resistance

Bondable Substrates

- | | |
|--|----------------------------|
| ABS | PET blends |
| Acrylics (PMMA) | Phenolics |
| Aluminum | Polycarbonate and blends |
| Brass | Polyurethanes ¹ |
| Ceramics | PPO and PPO blends |
| Copper | PVC & Vinyls |
| Epoxy | Rim urethane |
| Fiberglass | Rubber |
| Gel Coats | Stainless steel |
| Nylon 6 or Nylon 6 Alloys ¹ | Steel |
| PBT blends | |

¹ May need special treatment

Typical Properties (Uncured)

Property	Part A	Part B
Chemical Type	Methacrylate	Methacrylate
Appearance	Amber	Blue
Specific gravity	1.05	0.97
Viscosity at 25°C, cP	40,000 to 64,000	40,000 to 64,000
Mix ratio (by weight)	1	1
Flash Point	See MSDS	See MSDS

Typical Curing Performance

Property	Value
Working time, minutes	4 to 8
Fixture time, as received steel, mins.	6 to 10

Typical Properties (Cured)

Property	Value
Elongation, ASTM D638, %	20 to 40
Hardness, ASTM D2240, Shore D	75 to 80
Glass Transition Temperature, °C	95 to 100
Temperature Range, °C (°F)	-55 to 121 (-67 to 250)
Gap Fill, inches	0.380

Typical Cured Performance

Shear Strength, ASTM D1002
Gritblasted lap-shear specimens

SUBstrate	Cure at 22°C	Value, psi
Steel	24 Hours	>3000
Aluminum	24 Hours	>2000
Impact Strength, Steel	24 Hours	≥ 10 Joules

Typical Environmental Resistance


Heat Aging

Cured 24 hours at 22°C

Aged at 200°F for times indicated. Tested at room temp.

Shear Strength, ASTM D1002

Gritblasted lap-shear specimens

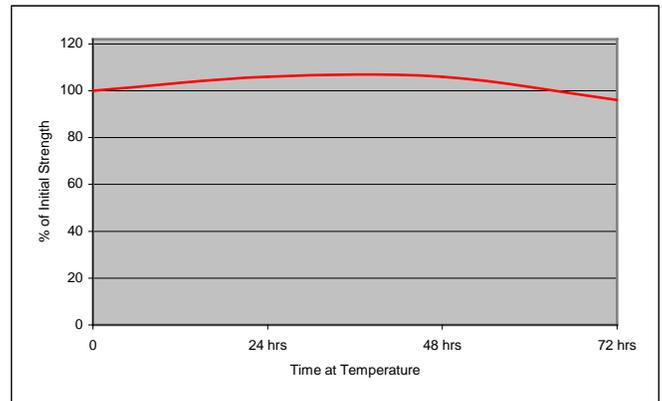

General Information

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

Handling and Application

Mixing: It is highly recommended that either meter mix equipment or cartridges with static mix nozzles be used to properly ratio and dispense the adhesive. For hand mixing, combine Part A and Part B in the correct ratio and mix thoroughly. Heat buildup during and after mixing is normal. To reduce the likelihood of exothermic reaction or excessive heat buildup, mix less than 100 grams at a time. Mixing smaller amounts will minimize heat buildup.

Applying: Bonding surfaces should be clean, dry, and free of contamination. Extensive surface preparation is not required for **Fusionbond® 375** and good bonds can be formed on most substrates after a solvent wipe. To assure maximum bond strength, surfaces must be mated within the adhesive's open time. Use enough material to completely fill the joint when parts are clamped.

Curing: Parts should remain undisturbed during the interval between the adhesive's open time and fixture time. After the fixture time is achieved the material has reached handling strength. Cure temperatures below room temperature (70°F to 75°F) will slow the fixturing time. Temperatures above room temperature will shorten the open time and the fixturing time.

Clean Up: It is important to clean up excess adhesive from the work area and application equipment before it cures. Use **Hernon® EF® Cleaner 62** for removing uncured adhesive. **Fusionbond® 375** is flammable. Keep containers tightly closed after use. Keep away from heat, sparks, and open flames.

Storage

Fusionbond® 375 should be stored in a cool, dry location in unopened containers at a temperature between 45°F and 82°F unless otherwise labeled. Shelf life can be extended by refrigeration at 45°F to 55°F (7°C to 13°C). To prevent contamination of unused material, do not return any material to its original container.

Dispensing Equipment

Hernon® offers a complete line of semi and fully automated dispensing equipment. Contact **Hernon® Sales** for additional information.

These suggestions and data are based on information we believe to be reliable and accurate, but no guarantee of their accuracy is made. HERNON MANUFACTURING, INC. shall not be liable for any damage, loss or injury, direct or consequential arising out of the use or the inability to use the product. In every case, we urge and recommend that purchasers, before using any product in full scale production, make their own tests to determine whether the product is of satisfactory quality and suitability for their operations, and the user assumes all risk and liability whatsoever, in connection therewith. Hernon's Quality Management System for the design and manufacture of high performance adhesives and sealants is registered to the ISO 9001:2008 Quality Standard.